


HSB-100 直套规格及公差 HSB-100 Sleeve Bushing Specification & Tolerance

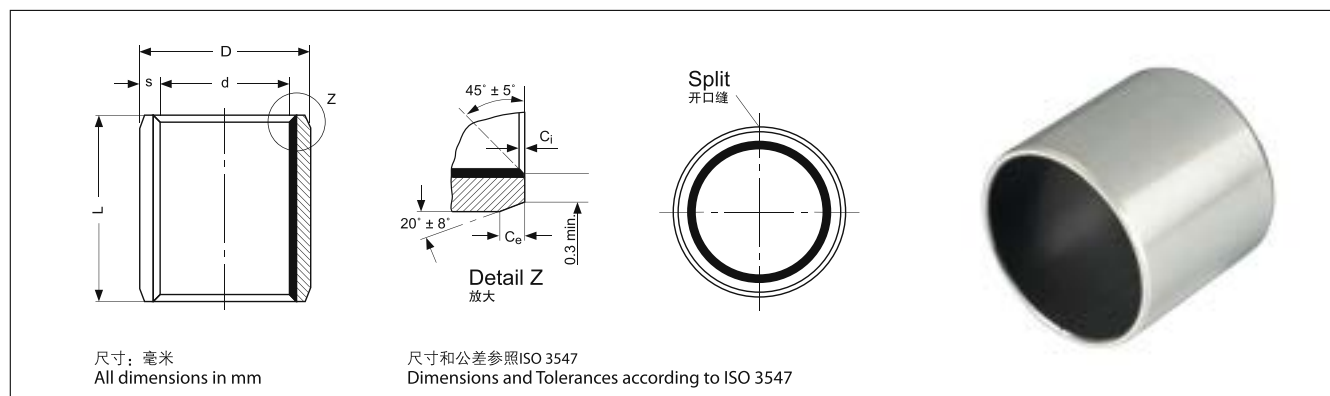

内外倒角尺寸表 Inside & Outside Chamfers

壁厚 Wall thickness S	内倒角 Inside Chamfer C _i	外倒角 Outside Chamfer C _e
0.75	0.25 ± 0.15	0.50 ± 0.30
1.00	0.30 ± 0.20	0.60 ± 0.40
1.50	0.40 ± 0.30	0.60 ± 0.40
2.00	0.40 ± 0.30	1.20 ± 0.40
2.50	0.60 ± 0.40	1.80 ± 0.60

直套型号标注方式 Bushing Symbol

直套型号标注方式 Bushes Symbol	HSB-100 - □	× ×	× ×
直套型号 Bushing Type			
直套内径 Bushing I.D.			
直套高度 Bushing Length			

单位Unit: mm

型号 Part No	内径 Internal Diameter (I.D.)			外径 External Diameter (O.D.)			高度 Length	壁厚 Wall Thickness
	内径 d	装配轴径 Shaft-Φ d _s	装配后内孔尺寸 Φ d _i	外径 D	装配座孔 Housing-Φ D _H	理论外径公差 O.D. Φ D _i	ID<80 L ± 0.25	S
							ID>80 L ± 0.50	
HSB-100 0404	4	4.000	4.048	5.5	5.508	+0.055 +0.025	4	0.750 0.730
HSB-100 0406		3.992	4.000		5.500		6	
HSB-100 0410							10	
HSB-100 0505	5	4.990	5.055	7	7.015		5	1.005 0.980
HSB-100 0508		4.978	4.990		7.000		8	
HSB-100 0510							10	
HSB-100 0604	6			8			4	
HSB-100 0606		5.990	6.055		8.015		6	
HSB-100 0608		5.978	5.990		8.000		8	
HSB-100 0610							10	
HSB-100 0705	7	6.987	7.055	9	9.015		5	
HSB-100 0710		6.972	6.990		9.000		10	
HSB-100 0806	8			10			6	
HSB-100 0808		7.987	8.055		10.015		8	
HSB-100 0810		7.972	7.990		10.000		10	
HSB-100 0812							12	
HSB-100 1008	10			12			8	
HSB-100 1010					12.018	10		
HSB-100 1012		9.987	10.058		12.000	12		
HSB-100 1015		9.972	9.990			15		
HSB-100 1020						20		
HSB-100 1208	12			14		+0.065 +0.030	8	
HSB-100 1210						10		
HSB-100 1212		11.984	12.058		14.018	12		
HSB-100 1215		11.966	11.990		14.000	1		
HSB-100 1220						20		
HSB-100 1225						25		

HSB-100 直套规格及公差

HSB-100 Sleeve Bushing Specification & Tolerance

单位Unit: mm

型号 Part No	内径 Internal Diameter (I.D.)			外径 External Diameter (O.D.)			高度 Length	壁厚 Wall Thickness
	内径 d	装配轴径 Shaft- Φ d _s	装配后内孔尺寸 Φ d _i	外径 D	装配座孔 Housing- Φ D _H	理论外径公差 O.D. Φ D _I	ID<80 L ± 0.25	S
							ID>80 L ± 0.50	
HSB-100 1310	13	12.984 12.966	13.058 12.990	15	15.018 15.000	+0.065 +0.030	10	1.005 0.980
HSB-100 1315							15	
HSB-100 1320							20	
HSB-100 1405	14	13.984 13.966	14.058 13.990	16	16.018 16.000		5	
HSB-100 1410							10	
HSB-100 1412							12	
HSB-100 1415							15	
HSB-100 1420							20	
HSB-100 1425							25	
HSB-100 1510	15	14.984 14.966	15.058 14.990	17	17.018 17.000		10	
HSB-100 1512							12	
HSB-100 1515							15	
HSB-100 1520							20	
HSB-100 1525							25	
HSB-100 1610	16	15.984 15.966	16.058 15.990	18	18.018 18.000		10	
HSB-100 1612							12	
HSB-100 1615							15	
HSB-100 1620							20	
HSB-100 1625							25	
HSB-100 1810	18	17.984 17.966	18.061 17.990	20	20.021 20.000		10	
HSB-100 1815							15	
HSB-100 1820							20	
HSB-100 1825							25	
HSB-100 2010	20	19.980 19.959	20.071 19.990	23	23.021 23.000		10	
HSB-100 2015							15	
HSB-100 2020							20	
HSB-100 2025							25	
HSB-100 2030							30	
HSB-100 2215							15	
HSB-100 2220	22	21.980 21.959	22.071 21.990	25	25.021 25.000		20	
HSB-100 2225							25	
HSB-100 2230							30	
HSB-100 2415						15		
HSB-100 2420	24	23.980 23.959	24.071 23.990	27	27.021 27.000	20		
HSB-100 2425						25		
HSB-100 2430						30		
HSB-100 2515						15		
HSB-100 2520	25	24.980 24.959	25.071 24.990	28	28.021 28.000	20		
HSB-100 2525						25		
HSB-100 2530						30		
HSB-100 2540						40		
HSB-100 2550						50		
HSB-100 2815						15		
HSB-100 2820	28	27.980 27.959	28.085 27.990	32	32.025 32.000	20		
HSB-100 2825						25		
HSB-100 2530						30		
HSB-100 3010						10		
HSB-100 3015	30	29.980 29.959	30.085 29.990	34	34.025 34.000	15		
HSB-100 3020						20		
HSB-100 3025						25		
HSB-100 3030						30		
HSB-100 3040						40		
HSB-100 3220						20		
HSB-100 3225	32	31.975 31.950	32.085 31.990	36	36.025 36.000	25		
HSB-100 3230						30		
HSB-100 3235						35		
HSB-100 3240						40		

HSB-100 直套规格及公差

HSB-100 Sleeve Bushing Specification & Tolerance

单位Unit: mm

型号 Part No	内径 Internal Diameter(I.D.)			外径 External Diameter(O.D.)			高度 Length	壁厚 Wall Thickness
	内径 d	装配轴径 Shaft-Φ d _s	装配后内孔尺寸 Φ d _i	外径 D	装配座孔 Housing-Φ D _H	理论外径公差 O.D. Φ D _t	ID<80 L ± 0.25	S
							ID>80 L ± 0.50	
HSB-100 3520	35	34.975 34.950	35.085 34.990	39	39.025 39.000	+0.085 +0.045	20	2.005 1.970
HSB-100 3530							30	
HSB-100 3535							35	
HSB-100 3540							40	
HSB-100 3550							50	
HSB-100 4012	40	39.975 39.950	40.085 39.990	44	44.025 44.000		12	
HSB-100 4020							20	
HSB-100 4025							25	
HSB-100 4030							30	
HSB-100 4040							40	
HSB-100 4050	50							
HSB-100 4520	45	44.975 44.950	45.105 44.990	50	50.025 50.000		20	
HSB-100 4530							30	
HSB-100 4540							40	
HSB-100 4545							45	
HSB-100 4550							50	
HSB-100 5020	50	49.975 49.950	50.110 49.990	55	55.030 55.000	20	2.505 2.460	
HSB-100 5030						30		
HSB-100 5040						40		
HSB-100 5050						50		
HSB-100 5060						60		
HSB-100 5520	55	54.970 54.940	55.110 54.990	60	60.030 60.000	20		
HSB-100 5525						25		
HSB-100 5530						30		
HSB-100 5540						40		
HSB-100 5550						50		
HSB-100 5555						55		
HSB-100 5560						60		
HSB-100 6020	60	59.970 59.940	60.110 59.990	65	65.030 65.000	20		
HSB-100 6030						30		
HSB-100 6040						40		
HSB-100 6050						50		
HSB-100 6060						60		
HSB-100 6070						70		
HSB-100 6530	65	64.970 64.940	65.110 64.990	70	70.030 70.000	30	2.505 2.460	
HSB-100 6550						50		
HSB-100 6570						70		
HSB-100 7040	70	69.970 69.940	70.110 69.990	75	75.030 75.000	40		
HSB-100 7050						50		
HSB-100 7070						70		
HSB-100 7560	75	74.970 74.940	75.110 74.990	80	80.030 80.000	60		
HSB-100 7580						80		
HSB-100 8060	80	80.000 79.946	80.155 80.020	85	85.035 85.000	60	2.490 2.440	
HSB-100 8080						80		
HSB-100 80100						100		
HSB-100 9060	85	85.000 84.946	85.155 85.020	90	90.035 90.000	60		
HSB-100 9080						80		
HSB-100 80100						100		
HSB-100 9060	90	90.000 89.946	90.155 90.020	95	95.035 95.000	60		
HSB-100 9080						80		
HSB-100 90100						100		
HSB-100 9560	95	95.000 94.946	95.155 95.020	100	100.035 100.000	60		
HSB-100 9580						80		
HSB-100 95100						100		

HSB-100 直套规格及公差

HSB-100 Sleeve Bushing Specification & Tolerance

单位Unit: mm

型号 Part No	内径 Internal Diameter(I.D.)			外径 External Diameter(O.D.)			高度 Length	壁厚 Wall Thickness
	内径 d	装配轴径 Shaft-Φd _s	装配后内孔尺寸 Φd _i	外径 D	装配座孔 Housing-ΦD _H	理论外径公差 O.D. ΦD _t	ID<80 L ± 0.25	S
							ID>80 L ± 0.50	
HSB-100 95100	100	100.000 99.946	100.155 100.020	105	105.035 105.000	+0.120 +0.070	100	2.490 2.440
HSB-100 10050							50	
HSB-100 10060							60	
HSB-100 10080							80	
HSB-100 100100							100	
HSB-100 10560	105	105.000 104.946	105.155 105.020	110	110.035 110.000		60	
HSB-100 10580							80	
HSB-100 105100							100	
HSB-100 11060	110	110.000 109.946	110.155 110.020	115	115.035 115.000		60	
HSB-100 11080							80	
HSB-100 110100							100	
HSB-100 11560	115	115.000 114.946	115.155 115.020	120	120.035 120.000		60	
HSB-100 11570							70	
HSB-100 12050	120	120.000 119.946	120.210 120.070	125	125.040 125.000	+0.170 +0.100	50	2.465 2.415
HSB-100 12060							60	
HSB-100 120100							100	
HSB-100 12560	125	125.000 124.937	125.210 125.070	130	130.040 130.000		60	
HSB-100 12580							80	
HSB-100 125100							100	
HSB-100 13060	130	130.000 129.937	130.210 130.070	135	135.040 135.000		60	
HSB-100 13080							80	
HSB-100 130100							100	
HSB-100 13560	135	135.000 134.937	135.210 135.070	140	140.040 140.000		60	
HSB-100 13580							80	
HSB-100 135100							100	
HSB-100 14060	140	140.000 139.937	140.210 140.070	145	145.040 145.000		60	
HSB-100 14080							80	
HSB-100 140100							100	
HSB-100 15060	150	150.000 149.937	150.210 150.070	155	155.040 155.000		60	
HSB-100 15080							80	
HSB-100 150100							100	
HSB-100 16080	160	160.000 159.937	160.210 160.070	165	165.040 165.000		80	
HSB-100 160100							100	
HSB-100 18080	180	180.000 179.937	180.216 180.070	185	185.046 185.000	+0.210 +0.130	80	
HSB-100 180100							100	
HSB-100 20080	200	200.000 199.928	200.216 200.070	205	205.046 205.000		80	
HSB-100 200100							100	
HSB-100 21080	210	210.000 209.928	210.216 210.070	215	215.046 215.000		80	
HSB-100 210100							100	
HSB-100 22080	220	220.000 219.928	220.216 220.070	225	225.046 225.000		80	
HSB-100 220100							100	
HSB-100 25080	250	250.000 249.928	250.222 250.070	255	255.052 255.000	+0.260 +0.170	80	
HSB-100 250100							100	
HSB-100 28080	280	280.000 279.948	280.222 280.070	285	285.052 285.000		80	
HSB-100 280100							100	
HSB-100 30080	300	300.000 299.919	300.222 300.070	305	305.052 305.000		80	
HSB-100 300100							100	