


HSB-100WC 垫片规格及公差

HSB-100WC Thrust washer Specification & Tolerance

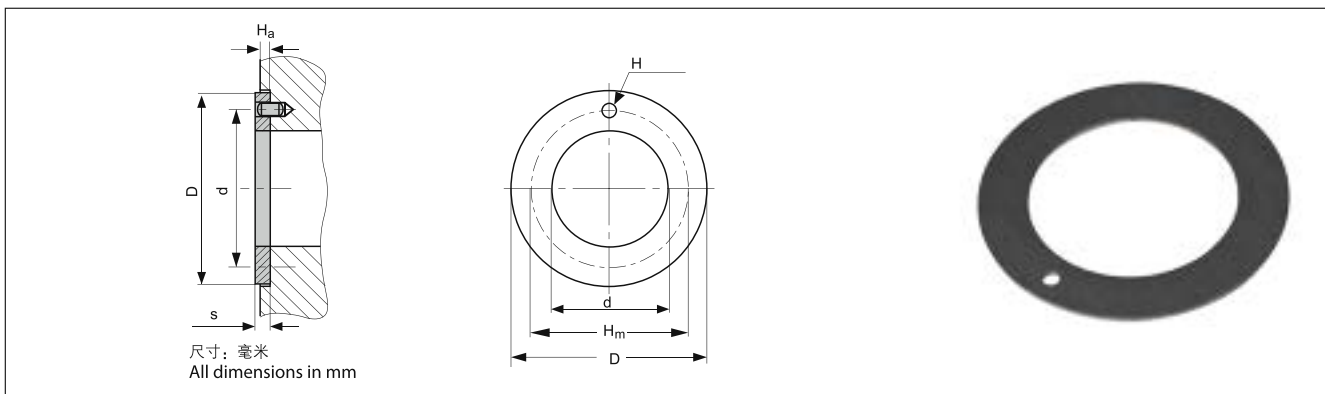

垫片型号标注方式

Washer Symbol

垫片型号标注方式 Washer Symbol	WC	× ×	HSB-100 - □
垫片 Washer			
垫片内径 Washer I.D.			
垫片型号 Washer Type			

单位Unit: mm

型号 Part No	内孔 Internal Diameter Φ d		外径 External Diameter Φ D		壁厚 Thickness s	定位孔大小 Dowel Hole Φ H	定位孔中心距 Dowel Hole PCD Φ Hm	装配深度 Recess Depth H _s	
	min	max	min.	max.	max. min.	max. min.	Φ ± 0.125	max. min.	
HSB-100WC 10	10.00	10.25	19.75	20.00	1.50 1.45	无孔 No Hole	无孔 No Hole	1.20 0.80	
HSB-100WC 12	12.00	12.25	23.75	24.00		1.90 1.60	18		
HSB-100WC 14	14.00	14.25	25.75	26.00		2.40 2.10	20		
HSB-100WC 16	16.00	16.25	29.75	30.00			22		
HSB-100WC 18	18.00	18.25	31.75	32.00			25		
HSB-100WC 20	20.00	20.25	35.75	36.00		3.40 3.10	28		
HSB-100WC 22	22.00	22.25	37.75	38.00			30		
HSB-100WC 24	24.00	24.25	41.75	42.00			33		
HSB-100WC 26	26.00	26.25	43.75	44.00			35		
HSB-100WC 28	28.00	28.25	47.75	48.00		4.40 4.10	38		
HSB-100WC 32	32.00	32.25	53.75	54.00			43		
HSB-100WC 38	38.00	38.25	61.75	62.00			50		
HSB-100WC 42	42.00	42.25	65.75	66.00			54		
HSB-100WC 48	48.00	48.25	73.75	74.00	2.00 1.95		61	1.70 1.30	
HSB-100WC 52	52.00	52.25	77.75	78.00			65		
HSB-100WC 62	62.00	62.25	89.75	90.00			76		