


HSB-200WC 垫片规格及公差
HSB-200WC Thrust washer Specification & Tolerance

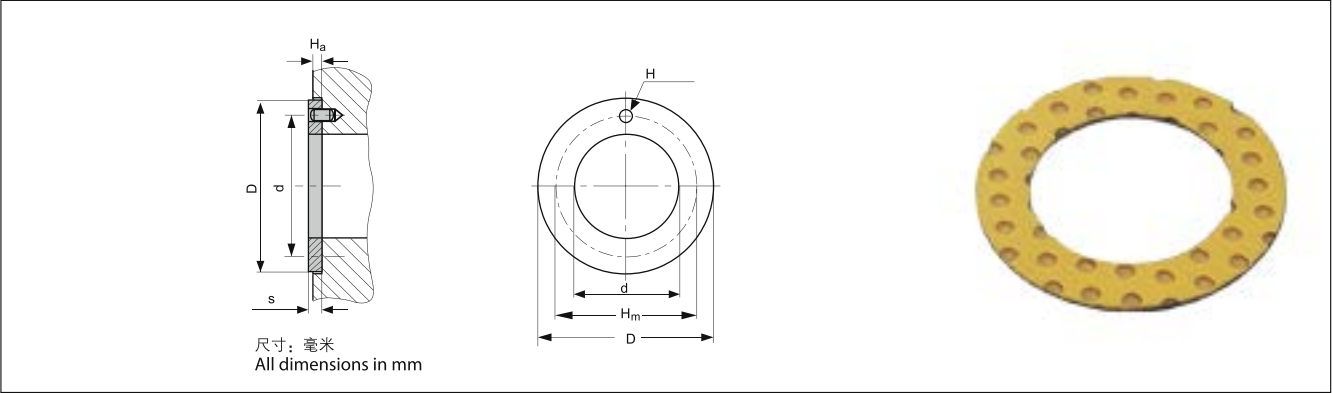

垫片型号标注方式
Washer Symbol

垫片型号标注方式 Washer Symbol	WC	× ×	HSB-200 - □
垫片 Washer			
垫片内径 Washer I. D.			
垫片型号 Washer Type			

单位Unit: mm

型号 Part No	内径 Internal Diameter d		外径 External Diameter D		壁厚 Thickness s	定位孔中心 Dowel Hole PCD- Φ H _m ± 0.12	定位孔直径 Dowel Hole- Φ H	Recess Depth H _a
	min.	max.	min.	max.				
HSB-200WC 10	12.00	12.25	23.75	24.00	1.50 1.45	18	1.9 1.6	1.20 0.80
HSB-200WC 12	14.00	14.25	25.75	26.00		20	2.4 2.1	
HSB-200WC 14	16.00	16.25	29.75	30.00		22		
HSB-200WC 16	18.00	18.25	31.75	32.00		25		
HSB-200WC 18	20.00	20.25	35.75	36.00		28	3.4 3.1	
HSB-200WC 20	22.00	22.25	37.75	38.00		30		
HSB-200WC 22	24.00	24.25	41.75	42.00		33		
HSB-200WC 24	26.00	26.25	43.75	44.00		35	4.4 4.1	
HSB-200WC 25	28.00	28.25	47.75	48.00		38		
HSB-200WC 30	32.00	32.25	53.75	54.00		43		
HSB-200WC 35	38.00	38.25	61.75	62.00		50		
HSB-200WC 40	42.00	42.25	65.75	66.00		54		
HSB-200WC 45	48.00	48.25	73.75	74.00	1.95 2.00	61		1.70 1.30
HSB-200WC 50	52.00	52.25	77.75	78.00		65		